




# Noodoe EV AC30P

Smart EV Charging

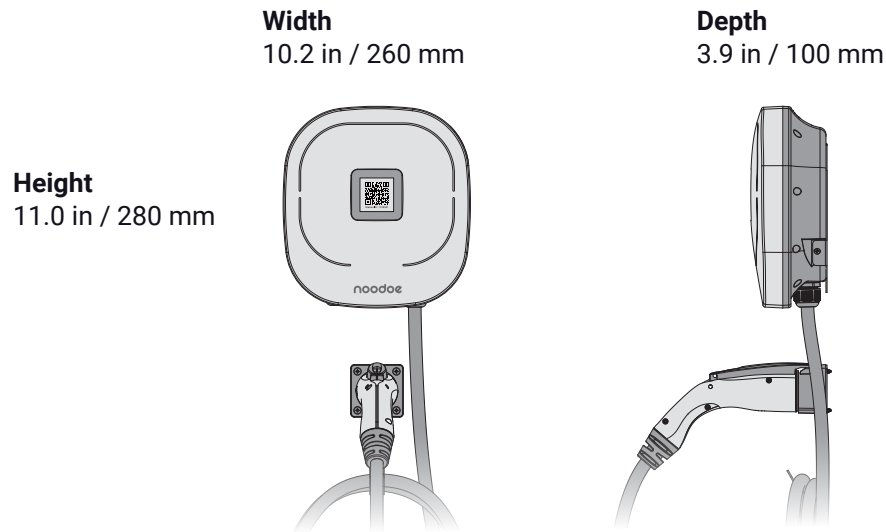

## SPECIFICATIONS

<b>Cloud service</b>	Noodoe EV OS
<b>Maximum output power</b>	7.6 kW
<b>Output power</b>	32 A @200~240Vac, 1-phase Up to 7.6 kW
<b>Vehicle connector</b>	SAE J1772
<b>Charging cable length</b>	16.4 feet / 5 m
<b>Input power</b>	1-phase, 3-wire, 200~240 Vac, 32 A maximum
<b>Grounding system</b>	TN, TT, IT
<b>Efficiency</b>	> 99%
<b>Power factor</b>	> 0.99
<b>Display</b>	LED indicator
<b>Communication protocol</b>	OCPP 1.6 JSON
<b>Network connectivity</b>	Ethernet, Wi-Fi
<b>RFID</b>	RFID ISO/IEC 14443 A/B
<b>NEMA enclosures(NEMA)</b>	NEMA 3R
<b>Impact protection</b>	IK08
<b>Electrical protection</b>	Over voltage protection, over current protection, over temperature protection, under voltage protection, charging circuit interrupting device, surge protection device, ground fault protection
<b>Operating temperature</b>	-22 °F to +122 °F / -30 °C to +50 °C
<b>Dimensions</b>	10.2 (W) x 11.0 (H) x 3.9 (D) in
<b>Weight</b>	260 (W) x 280 (H) x 100 (D) mm 8.8 lbs / 4 kg
<b>Certifications</b>	UL, cUL, FCC

Noodoe EV OS



**Noodoe Inc.**

9351 Irvine Blvd  
Irvine, CA 92618  
+1 909-468-1118  
info@noodoe.com  
noodoe.com